


ZH-A款板前、C款板后防爆信号灯元件

ZH-A type board front, C type board back explosion-proof signal lamp component



型号及其含义 Model and meaning

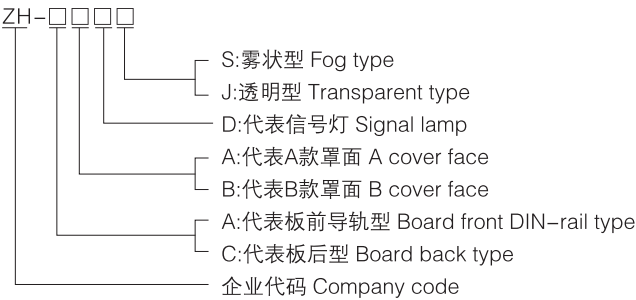

适用范围 Applications

- 1区、2区或20区、21区和22区危险场所；
 - II A、II B、II C类爆炸性气体环境；
 - 可燃性粉尘环境；
 - 有强腐蚀气体环境。
-
1. Hazardous areas: Zone 1&2 or zone 20、21、22;
 2. Explosive gas atmosphere: class II A、II B、II C;
 3. Flammable dust atmospheres;
 4. Strong corrosive gas environment;

主要数据 Main technical data:

防爆标志: Ex de II C T6 DIP A21 TA,T6
适用范围: 用于1区和2区
使用环境温度: $-60^{\circ}\text{C} \leq \text{Ta} \leq 55^{\circ}\text{C}$
防护等级: IP67(配合操作头)
额定电压: AC.DC6.3V-220V AC110V-380V
功耗: $P_{\text{max}} \leq 1\text{W}$
光源: LED
电气寿命: 30万小时
符合标准: IEC60079 IEC61241 EN60079 EN61241

Ex mark:Ex de II C T6 DIP A21 TA,T6
Application: zone 1 and zone 2
Ambient temperature: $-60^{\circ}\text{C} \leq \text{Ta} \leq 55^{\circ}\text{C}$
Degree of protection:IP67(Match operation head)
Rated voltage: AC.DC6.3V-220V AC110V-380V
Power consumption: $P_{\text{max}} \leq 1\text{W}$
Light source: LED
Electric life: 300,000 hours
Standard: IEC60079 IEC61241
EN60079 EN61241

订购规格 Order specifications


图样 Illustration	型号 Model	信号灯颜色 Colour	信号灯模块电压 The voltage of signal lamp module
 雾状型 Fog type	ZH-AADS	红 Red 绿 Green 黄 Yellow 蓝 Blue 白 White	AC110V-380V AC.DC6.3V-220V
 透明型 Transparent type	ZH-ABDJ		
 雾状型 Fog shape type	ZH-CADS		
 透明型 Transparent type	ZH-CBDJ		

ZH-A款板前、C款板后防爆信号灯元件

ZH-A type board front, C type board back explosion-proof signal lamp component

CHFB 浙豪

外型尺寸 Outline dimensions

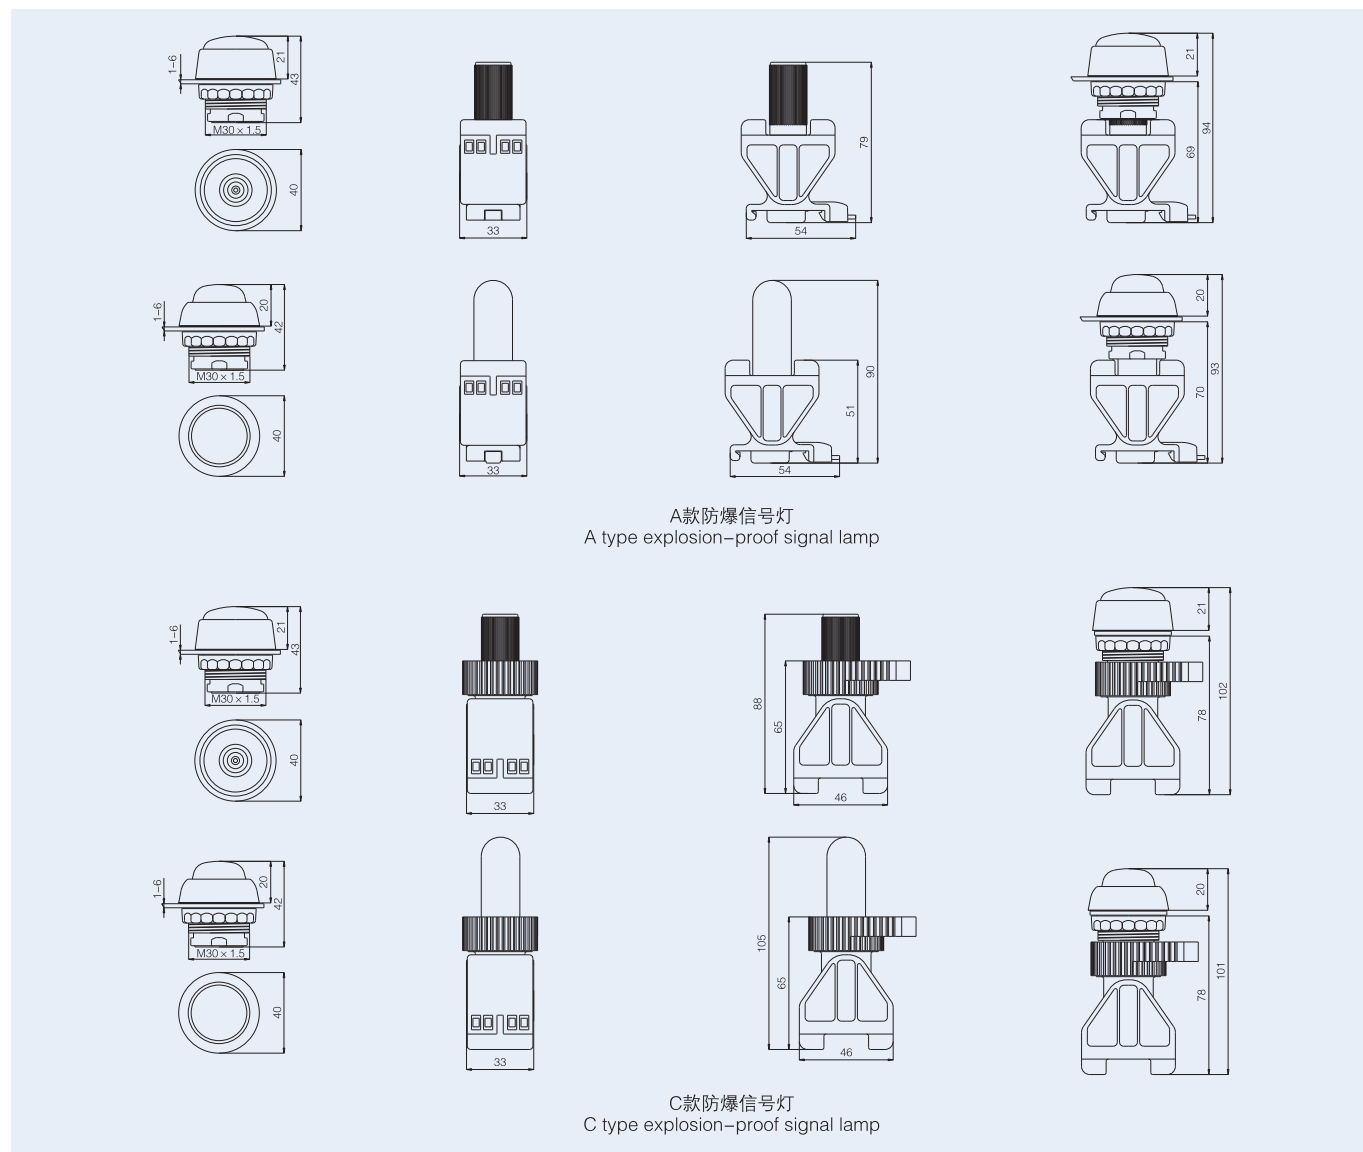

安装间距及开孔尺寸 Mounting distance and cut-out dimensions

